




OWL Wide-Band Antennas

OWL-0440-XX



Characteristics:

4 - 40 GHz
Offset-fed Prime Focus
Quad Ridge Feed
Dual Linear Pol
TRL 9 / MRL 9 Feed

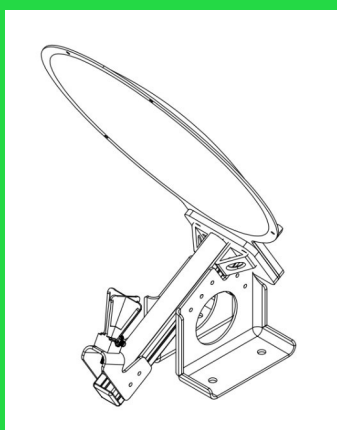

Modifications:

Sub-band Optimization
Reflector Size
Mounting Features
Electronics Mounting
SWAP Optimization
Tool-less Takedown
Transit Cases
Finish / Paint

Salt Lake Scientific, LLC

Sandy, UT

service@saltlakescientific.com

CAGE: 7MJN8

Rev A

	OWL-0440-12	OWL-0440-15	OWL-0440-18	OWL-0440-24
Frequency:	5 - 40 GHz	4 - 40 GHz	4 - 40 GHz	4 - 40 GHz
Reflector:	12in	15in	18in	24in
Max Dim:	10.4"x19.3"x13.5"	11.9"x23.1"x16.9"	13.5"x27.1"x20.2"	16.4"x34.8"x26.9"
Mass:	< 5.4 lbm	< 6.9 lbm	< 9.1 lbm	< 15.0 lbm
Materials:	Aluminum			
Finish:	MIL-DTL-5541 (Type II, Class 3) and Anodized			
RF Connector:	Female 2.9mm - Type K			
VSWR (max):	70:1			
VSWR (avg):	1.6:1			
Impedance:	50 Ohm			
Power:	5 W (CW) / 10 W (Peak)			
Port Isolation:	> 30 dB			
Op.Temp.:	0 to +50 degC			
Storage Temp.:	-20 to +70 degC			

